


Remote Replacement for Honor




1. Remove the 4 screws holding the rear panel.
2. Slide rear panel downwards slightly and pull back.

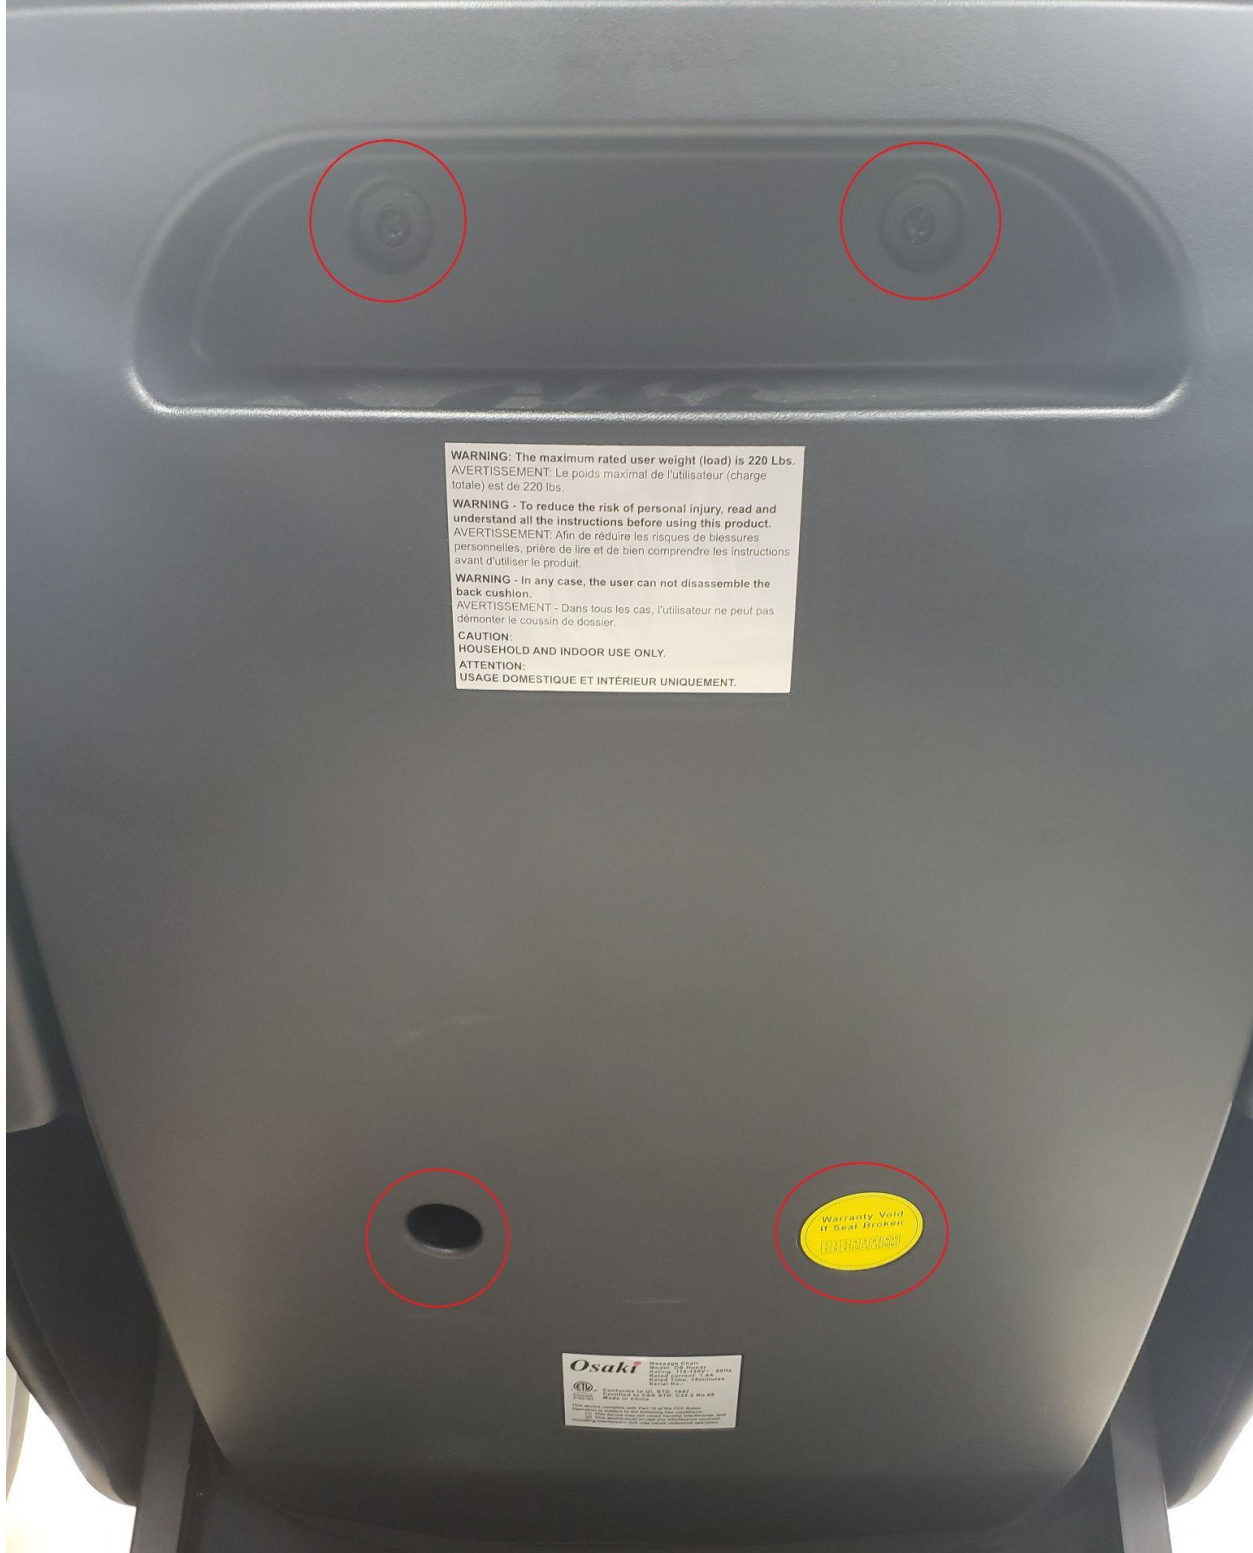

3. Locate and cut the 2 zip ties holding the remote wire



4. Unscrew the remote wire holder

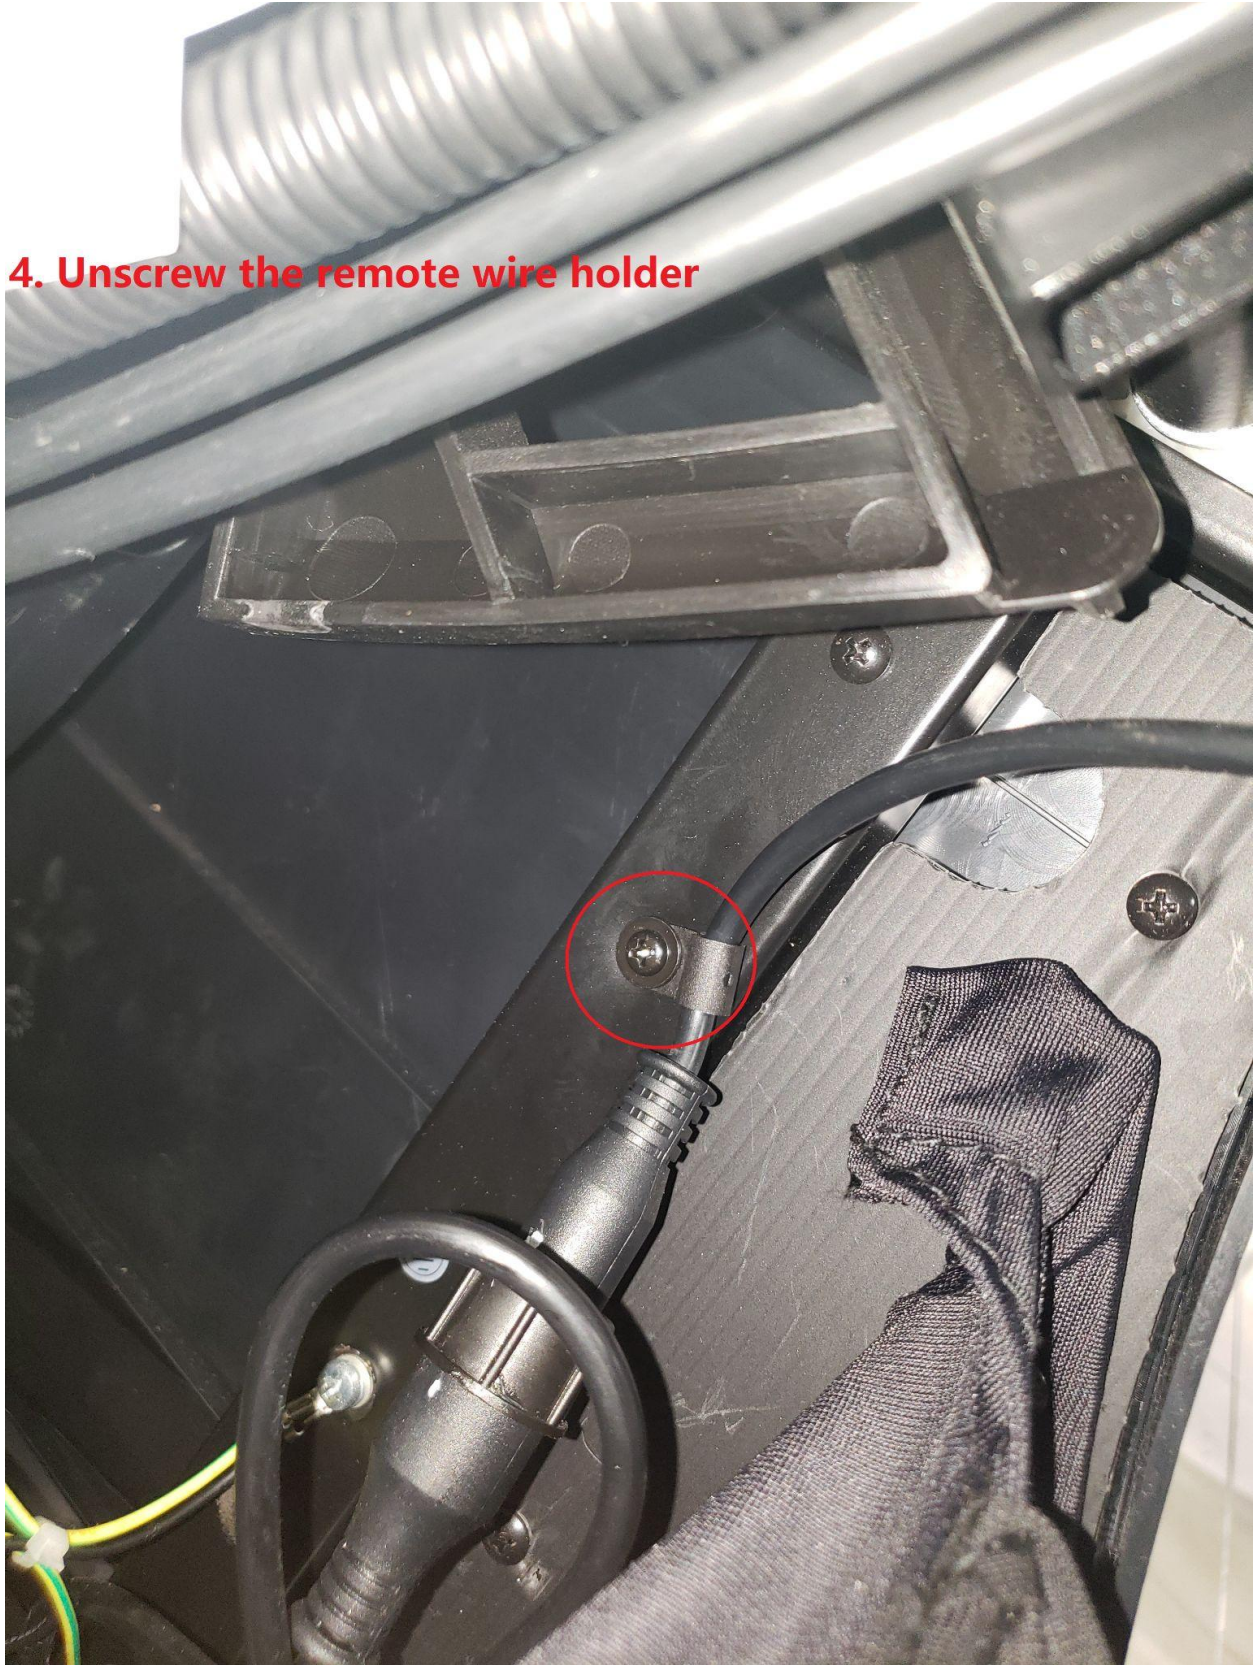

5. Twist the cap holding the remote wire to the connector.
6. Seperate the remote wire and remote connector.



7. Seperate the shoulder airbag and the backpad to pull the remote cord.



8. Pull remote wire from gap




9. Push new remote wire into same gap.



- 10. Connect new remote wire to wire connector.**
11. Zip tie (preferred) to bar which wire previously was zip tied to.



12. Put the rear panel back into place. Make sure the two plastic bars on the rear panel slide underneath the grooves on the chair.

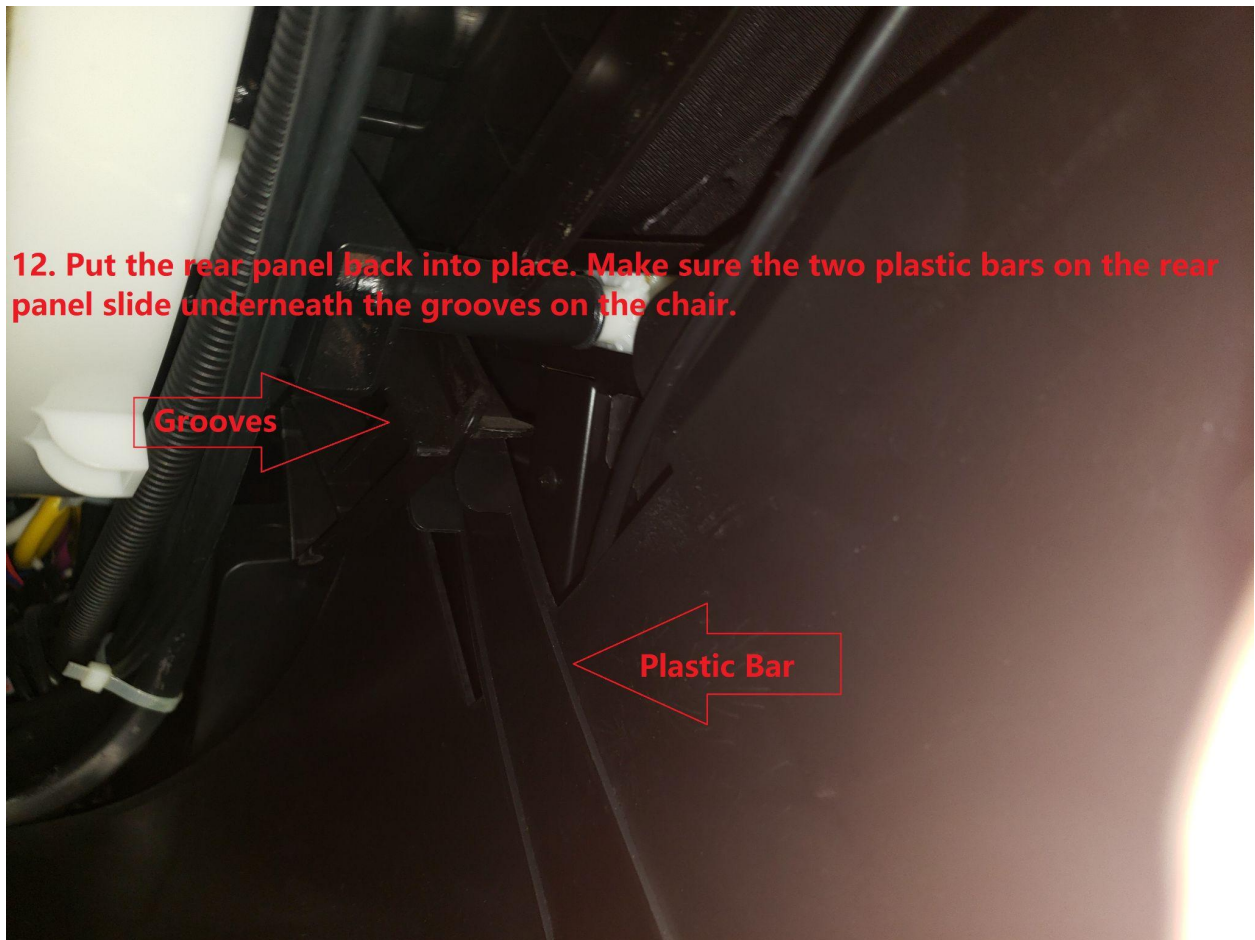

13. Slide rear panel slightly upwards to secure back into place.
14. Screw the 4 rear panel screws back in. Make sure the top two holes are lined up properly (they're easier to see than the bottom two).

